



Power MOSFETS

DATASHEET

LM1A035NHV2A

N-Channel
Enhancement Mode MOSFET

 Leadpower-semiconductor Corp., Ltd

 sales@leadpower-semi.com

 (03) 6577339 FAX : (03) 6577229

 www.leadpower-semi.com





Quality Management Systems

ISO 9001:2015 Certificate

N-Channel Enhancement Mode MOSFET

Pin Description

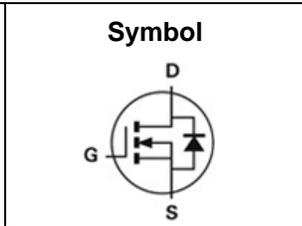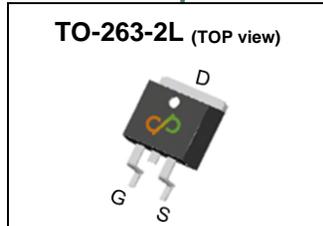

Product Summary

Symbol	N-Channel	Unit
V_{DSS}	100	V
$R_{DS(ON)-Max}$	3.3	m Ω
I_D	215	A

Feature

- High Speed Power Switching
- Reliable and Rugged
- ROHS Compliant & Halogen-Free
- 100% UIS Tested

Applications

- Synchronous Rectification in SMPS
- Hard Switching and High Speed Circuit

Ordering Information

Orderable Part Number	Package Type	Form	Shipping	Marking
LM1A035NHV2A	TO-263-2L	Tube	50 / Tape & Reel	1A035 □□□□□□

Absolute Maximum Ratings (T_J=25°C Unless Otherwise Noted)

Symbol	Parameter	N-Channel	Unit
V_{DSS}	Drain-Source Voltage	100	V
V_{GSS}	Gate-Source Voltage	±20	
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-55 to 150	°C
$I_{DM}^{①}$	Pulse Drain Current Tested	$T_c=25^\circ C$ 245	A
I_D	Continuous Drain Current	$T_c=25^\circ C$ 215	A
		$T_c=100^\circ C$ 136	
P_D	Maximum Power Dissipation	$T_c=25^\circ C$ 284	W
		$T_c=100^\circ C$ 114	
$I_{AS}^{②}$	Avalanche Current, Single pulse	L=0.5mH 25	A
$E_{AS}^{②}$	Avalanche Energy, Single pulse	L=0.5mH 156	mJ

Thermal Characteristics

Symbol	Parameter	Rating	Unit
$R_{\theta JC}$	Thermal Resistance-Junction to Case	Steady State 0.44	°C/W
$R_{\theta JA}^{③}$	Thermal Resistance-Junction to Ambient	Steady State 60	°C/W

Note ① : Max. current is limited by bonding wire

Note ② : UIS tested and pulse width are limited by maximum junction temperature 150°C

Note ③ : Surface Mounted on 1in² FR-4 board with 1oz.


N-Channel Electrical Characteristics (T_J=25°C Unless Otherwise Noted)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Electrical Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250uA	100	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V _{DS} =80V, V _{GS} =0V	-	-	1	uA
V_{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250uA	2	3	4	V
I_{GSS}	Gate Leakage Current	V _{GS} =±20V, V _{DS} =0V	-	-	±100	nA
R_{DS(ON)}^④	Drain-Source On-state Resistance	V _{GS} =10V, I _{DS} =20A	-	2.7	3.3	mΩ
gfs	Forward Transconductance	V _{DS} =5V, I _{DS} =10A	-	37	-	S
Dynamic Characteristics^⑤						
R_G	Gate Resistance	V _{GS} =0V, V _{DS} =0V, Freq.=1MHz	-	1.5	-	Ω
C_{iSS}	Input Capacitance	V _{GS} =0V, V _{DS} =50V, Freq.=1MHz	-	6675	-	pF
C_{oss}	Output Capacitance		-	989	-	
C_{rSS}	Reverse Transfer Capacitance		-	84	-	
td(ON)	Turn-on Delay Time	V _{GS} =10V, V _{DS} =50V, I _D =1A, R _{GEN} =6Ω	-	22	-	nS
t_r	Turn-on Rise Time		-	20.4	-	
t_{d(OFF)}	Turn-off Delay Time		-	63.4	-	
t_f	Turn-off Fall Time		-	120.2	-	
Q_g	Total Gate Charge	V _{GS} =10V, V _{DS} =50V, I _D =20A	-	111.3	-	nC
Q_{gs}	Gate-Source Charge		-	31.9	-	
Q_{gd}	Gate-Drain Charge		-	27.5	-	
Source-Drain Characteristics						
V_{SD}^④	Diode Forward Voltage	I _{SD} =10A, V _{GS} =0V	-	0.75	1.1	V
t_{rr}	Reverse Recovery Time	I _F =10A, V _R =50V	-	87.9	-	nS
Q_{rr}	Reverse Recovery Charge	di _F /dt=100A/μs	-	199.3	-	nC


Note ④ : Pulse test (pulse width≤300us, duty cycle≤2%).

Note ⑤ : Guaranteed by design, not subject to production testing.


N-Channel Typical Characteristics

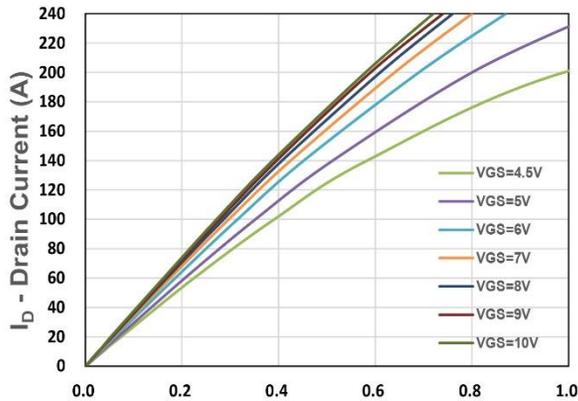


V_{DS} - Drain - Source Voltage (V)
Figure 1. Output Characteristics

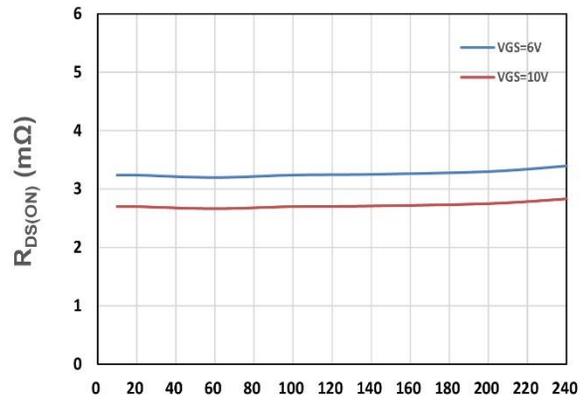


I_D - Drain Current (A)
Figure 2. On-Resistance vs. ID

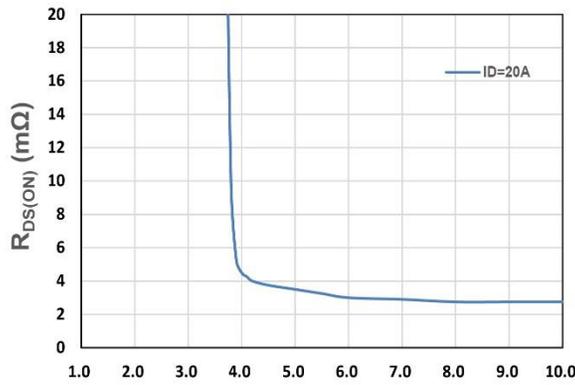


V_{GS} - Gate - Source Voltage (V)
Figure 3. On-Resistance vs. VGS

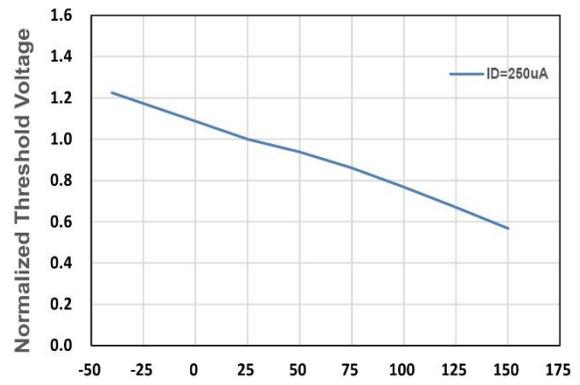


T_j , Junction Temperature($^{\circ}C$)
Figure 4. Gate Threshold Voltage

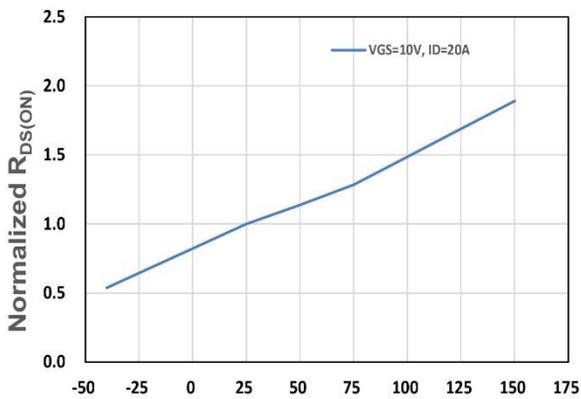

T_j , Junction Temperature($^{\circ}C$)
Figure 5. Drain-Source On Resistance

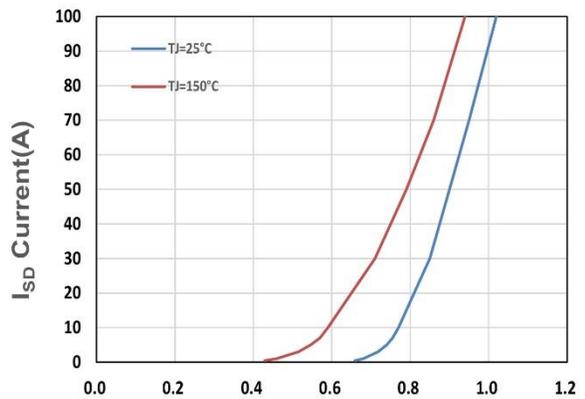


V_{SD} , Source-Drain Voltage(V)
Figure 6. Source-Drain Diode Forward

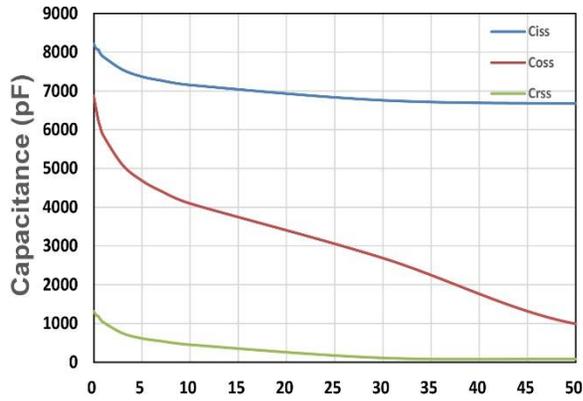


V_{DS} - Drain - Source Voltage (V)

Figure 7. Capacitance

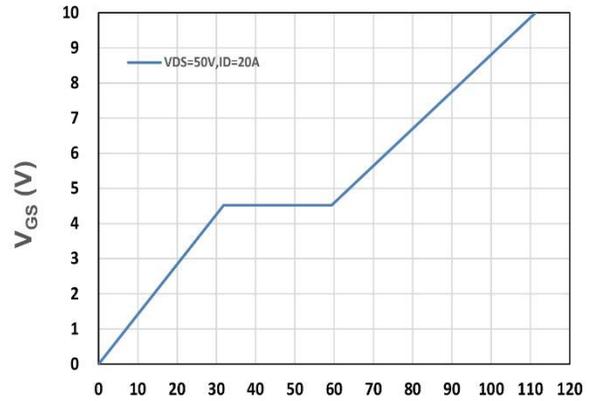


Q_g , Total Gate Charge (nC)

Figure 8. Gate Charge Characteristics

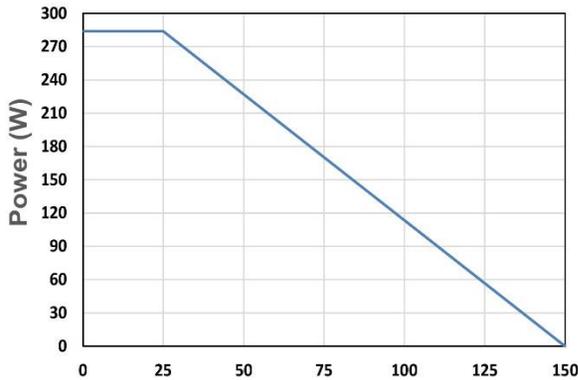


T_C - Case Temperature (°C)

Figure 9. Power Dissipation

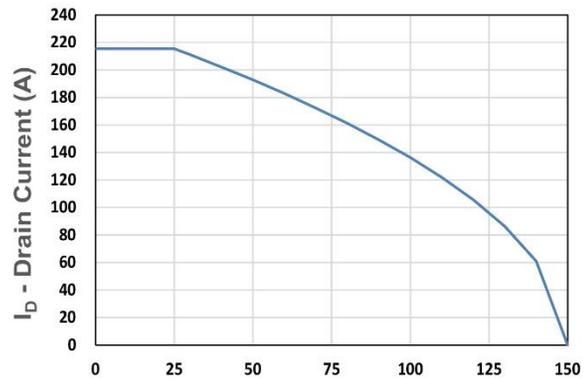


T_C - Case Temperature (°C)

Figure 10. Drain Current

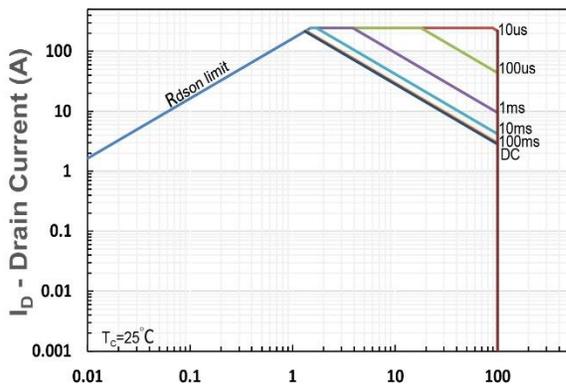

V_{DS} - Drain-Source Voltage (V)

Figure 11. Safe Operating Area

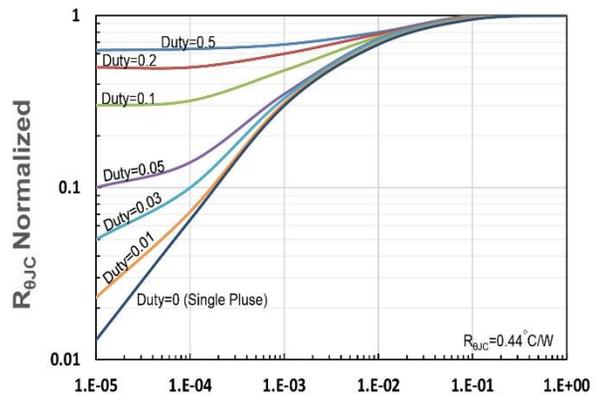

t_1 , Square Wave Pulse Duration(s)

Figure 12. $R_{\theta JC}$ Transient Thermal Impedance