




Power MOSFETS

DATASHEET

LM20260NL3A

N-Channel
Enhancement Mode MOSFET

 Leadpower-semiconductor Corp., Ltd

 sales@leadpower-semi.com

 (03) 6577339 FAX : (03) 6577229

 www.leadpower-semi.com



Quality Management Systems

ISO 9001:2015 Certificate

N-Channel Enhancement Mode MOSFET

Pin Description

SOT-23 (TOP view) 	Symbol 	Symbol	N-Channel	Unit
		V_{DSS}	20	V
		$R_{DS(ON)-Max}$	25	mΩ
		I_D	5.1	A

Ordering Information

Feature

- Fast switching speed
- Reliable and Rugged
- ROHS Compliant & Halogen-Free

Applications

- Portable Equipment
- Battery Powered System

Ordering Information

Orderable Part Number	Package Type	Form	Shipping	Marking
LM20260NLI3A	SOT-23	Tape & Reel	3000 / Tape & Reel	26□□□

Absolute Maximum Ratings (T_J=25°C Unless Otherwise Noted)

Symbol	Parameter	N-Channel	Unit	
V_{DSS}	Drain-Source Voltage	20	V	
V_{GSS}	Gate-Source Voltage	±12		
T_J	Maximum Junction Temperature	150	°C	
T_{STG}	Storage Temperature Range	-55 to 150	°C	
$I_{DM}^{①}$	Pulse Drain Current Tested	$T_A=25^{\circ}C$	12.6	A
I_D	Continuous Drain Current	$T_A=25^{\circ}C$	5.1	A
		$T_A=70^{\circ}C$	4	
P_D	Maximum Power Dissipation	$T_A=25^{\circ}C$	1	W
		$T_A=70^{\circ}C$	0.6	
$I_{AS}^{②}$	Avalanche Current, Single pulse	L=0.1mH	14	A
$E_{AS}^{②}$	Avalanche Energy, Single pulse	L=0.1mH	9.8	mJ

Thermal Characteristics

Symbol	Parameter	Rating	Unit	
$R_{\theta JA}^{③}$	Thermal Resistance-Junction to Ambient	t<=10s	90	°C/W
		Steady State	125	°C/W

Note ① : Max. current is limited by junction temperature.

Note ② : UIS tested and pulse width are limited by maximum junction temperature 150°C

Note ③ : Surface Mounted on 1in² FR-4 board with 1oz.


N-Channel Electrical Characteristics (T_J=25°C Unless Otherwise Noted)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Electrical Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =250uA	20	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	V _{DS} =16V, V _{GS} =0V	-	-	1	uA
V_{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =250uA	0.4	0.65	0.9	V
I_{GSS}	Gate Leakage Current	V _{GS} =±12V, V _{DS} =0V	-	-	±100	nA
R_{DS(ON)}^④	Drain-Source On-state Resistance	V _{GS} =4.5V, I _{DS} =1.5A	-	21	25	mΩ
		V _{GS} =2.5V, I _{DS} =1.5A	-	25	33	
g_{fs}	Forward Transconductance	V _{DS} =10V, I _{DS} =1.5A	-	4.7	-	S
Dynamic Characteristics[®]						
R_G	Gate Resistance	V _{GS} =0V, V _{DS} =0V, Freq.=1MHz	-	2	-	Ω
C_{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =10V, Freq.=1MHz	-	427	-	pF
C_{oss}	Output Capacitance					
C_{rss}	Reverse Transfer Capacitance					
t_{d(ON)}	Turn-on Delay Time	V _{GS} =4.5V, V _{DS} =10V, I _D =1A, R _{GEN} =6Ω	-	4	-	nS
t_r	Turn-on Rise Time					
t_{d(OFF)}	Turn-off Delay Time					
t_f	Turn-off Fall Time					
Q_g	Total Gate Charge	V _{GS} =4.5V, V _{DS} =10V, I _D =6A	-	8.6	-	nC
Q_{gs}	Gate-Source Charge					
Q_{gd}	Gate-Drain Charge					
Source-Drain Characteristics						
V_{SD}^④	Diode Forward Voltage	I _{SD} =1A, V _{GS} =0V	-	0.75	1.1	V
t_{rr}	Reverse Recovery Time	I _F =6A, V _R =10V	-	18	-	nS
Q_{rr}	Reverse Recovery Charge	dI _F /dt=100A/μs	-	5.5	-	nC


Note ④ : Pulse test (pulse width≤300us, duty cycle≤2%).

Note ⑤ : Guaranteed by design, not subject to production testing.


N-Channel Typical Characteristics

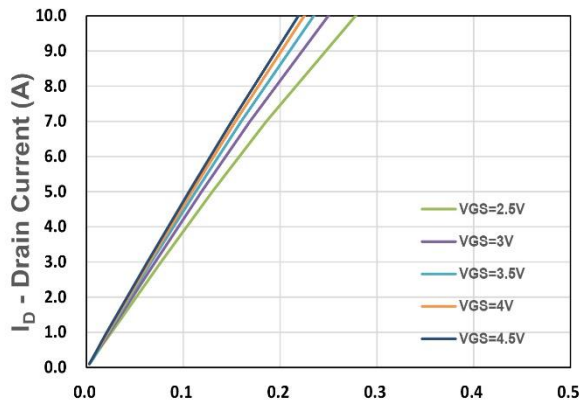


V_{DS} - Drain - Source Voltage (V)
Figure 1. Output Characteristics

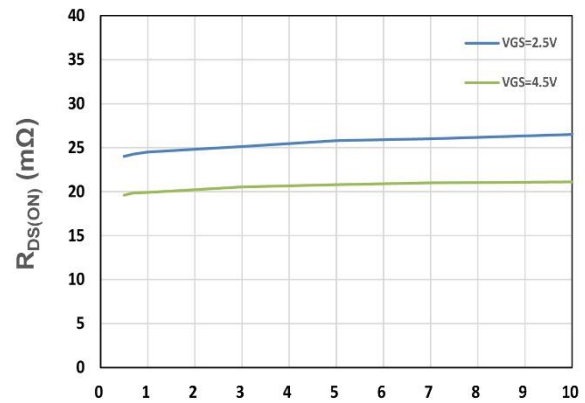


I_D - Drain Current (A)
Figure 2. On-Resistance vs. I_D

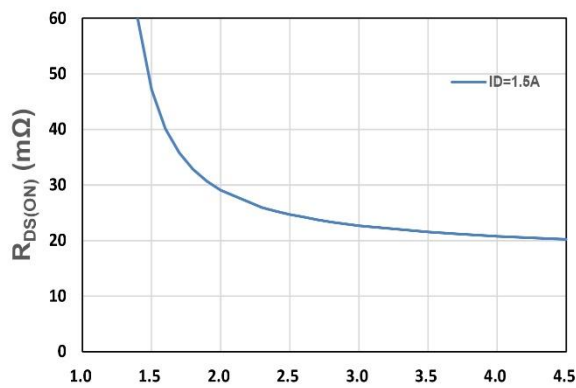


V_{GS} - Gate - Source Voltage (V)
Figure 3. On-Resistance vs. V_{GS}

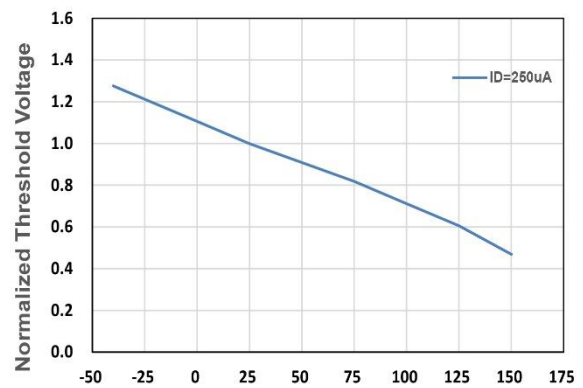


T_j , Junction Temperature($^{\circ}C$)
Figure 4. Gate Threshold Voltage

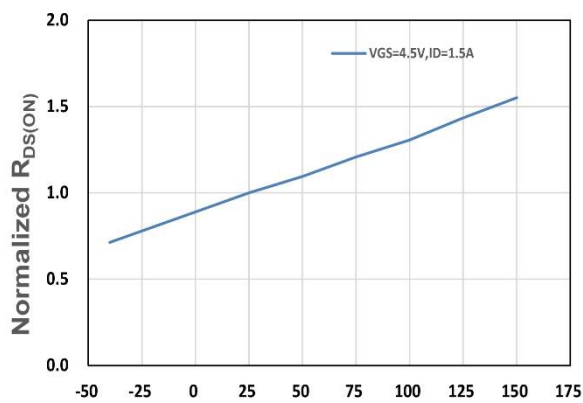


T_j , Junction Temperature($^{\circ}C$)
Figure 5. Drain-Source On Resistance

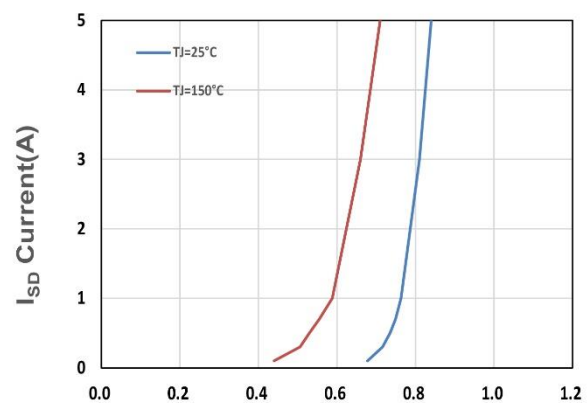


V_{SD} , Source-Drain Voltage(V)
Figure 6. Source-Drain Diode Forward

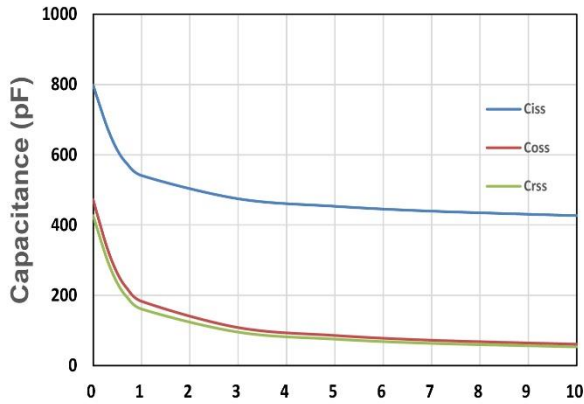


V_{DS} - Drain - Source Voltage (V)
Figure 7. Capacitance

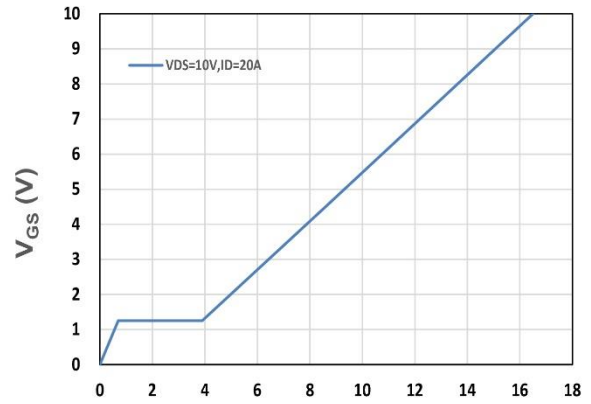


Q_g , Total Gate Charge (nC)
Figure 8. Gate Charge Characteristics

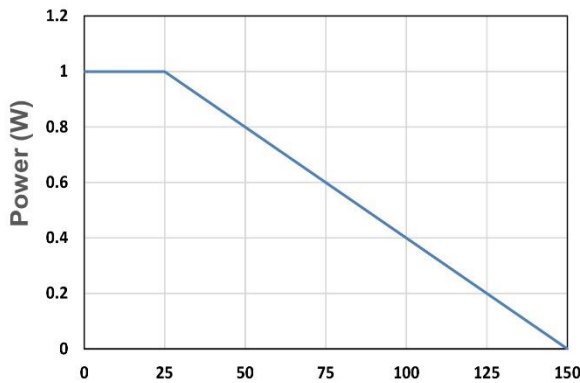


T_A - Ambient Temperature(°C)
Figure 9. Power Dissipation

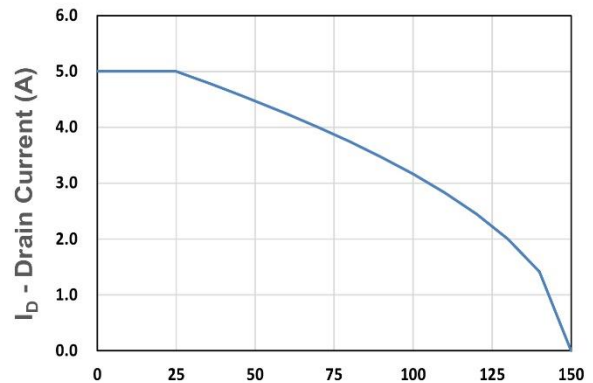

T_A - Ambient Temperature(°C)
Figure 10. Drain Current

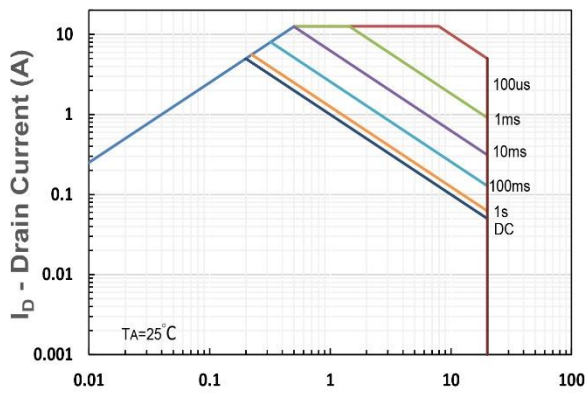

V_{DS} - Drain-Source Voltage (V)
Figure 11. Safe Operating Area

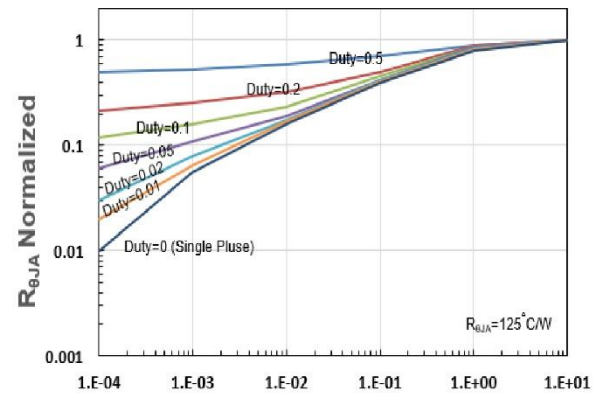

t_1 , Square Wave Pulse Duration(s)
Figure 12. $R_{\theta JA}$ Transient Thermal Impedance