



# Power MOSFETS


## DATASHEET


---

**LM1A013NHV6A**

N-Channel  
Enhancement Mode MOSFET

 Leadpower-semiconductor Corp., Ltd

 [sales@leadpower-semi.com](mailto:sales@leadpower-semi.com)

 (03) 6577339 FAX : (03) 6577229

 [www.leadpower-semi.com](http://www.leadpower-semi.com)





Quality Management Systems

ISO 9001:2015 Certificate

## N-Channel Enhancement Mode MOSFET

### Pin Description



### Product Summary

Symbol	N-Channel	Unit
$V_{DSS}$	100	V
$R_{DS(ON)-Max}$	1.6	m $\Omega$
ID	403	A

### Feature

- High Threshold Voltage
- Fast switching speed
- Reliable and Rugged
- ROHS Compliant & Halogen-Free
- 100% UIS and Rg Tested

### Applications

- Power Management in DC/DC Converters
- Motor Driver
- Uninterruptible Power Supply

### Ordering Information

Orderable Part Number	Package Type	Form	Shipping	Marking
LM1A013NHV6A	TO-263-6L	Tape & Reel	800 / Tape & Reel	1A013 □□□□□□

Note : □□□□□□ = Lot Code

### Absolute Maximum Ratings (T<sub>J</sub>=25°C Unless Otherwise Noted)

Symbol	Parameter	N-Channel	Unit
$V_{DSS}$	Drain-Source Voltage	100	V
$V_{GSS}$	Gate-Source Voltage	±20	
$T_J$	Maximum Junction Temperature	175	°C
$T_{STG}$	Storage Temperature Range	-55 to 175	°C
$I_S$	Diode Continuous Forward Current	$T_C=25^\circ C$ 227	A
$I_{DM}^{①}$	Pulse Drain Current Tested	$T_C=25^\circ C$ 1009	A
$I_D$	Continuous Drain Current	$T_C=25^\circ C$ 403 $T_C=100^\circ C$ 285	A
$P_D$	Maximum Power Dissipation	$T_C=25^\circ C$ 500 $T_C=100^\circ C$ 250	W
$I_D$	Continuous Drain Current	$T_A=25^\circ C$ 33 $T_A=70^\circ C$ 27.6	A
$P_D$	Maximum Power Dissipation	$T_A=25^\circ C$ 3.3 $T_A=70^\circ C$ 2.3	W
$I_{AS}^{②}$	Avalanche Current, Single pulse	L=0.1mH 100 L=0.5mH 55	A
$E_{AS}^{③}$	Avalanche Energy, Single pulse	L=0.1mH 500 L=0.5mH 756	mJ

### Thermal Characteristics

Symbol	Parameter	Rating	Unit
$R_{\theta JC}$	Thermal Resistance-Junction to Case	Steady State	0.3 °C/W
$R_{\theta JA}^{③}$	Thermal Resistance-Junction to Ambient	Steady State	45 °C/W

Note ① : Max. current is limited by junction temperature

Note ② : UIS tested and pulse width are limited by maximum junction temperature 150°C

Note ③ : Surface Mounted on 1in<sup>2</sup> FR-4 board with 1oz

## N-Channel Electrical Characteristics (T<sub>J</sub>=25°C Unless Otherwise Noted)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
<b>Static Electrical Characteristics</b>						
<b>BV<sub>DSS</sub></b>	Drain-Source Breakdown Voltage	V <sub>GS</sub> =0V, I <sub>DS</sub> =250uA	100	-	-	V
<b>I<sub>DSS</sub></b>	Zero Gate Voltage Drain Current	V <sub>DS</sub> =80V, V <sub>GS</sub> =0V	-	-	1	uA
<b>V<sub>GS(th)</sub></b>	Gate Threshold Voltage	V <sub>DS</sub> =V <sub>GS</sub> , I <sub>DS</sub> =250uA	2	3	4	V
<b>I<sub>GSS</sub></b>	Gate Leakage Current	V <sub>GS</sub> =±20V, V <sub>DS</sub> =0V	-	-	±100	nA
<b>R<sub>DS(ON)</sub><sup>④</sup></b>	Drain-Source On-state Resistance	V <sub>GS</sub> =10V, I <sub>DS</sub> =30A	-	1.3	1.6	mΩ
<b>gfs</b>	Forward Transconductance	V <sub>DS</sub> =5V, I <sub>DS</sub> =50A	-	140	-	S
<b>Dynamic Characteristics<sup>⑤</sup></b>						
<b>R<sub>G</sub></b>	Gate Resistance	V <sub>GS</sub> =0V, V <sub>DS</sub> =0V, Freq.=1MHz	-	0.7	-	Ω
<b>C<sub>iSS</sub></b>	Input Capacitance	V <sub>GS</sub> =0V, V <sub>DS</sub> =50V, Freq.=1MHz	-	12340	-	pF
<b>C<sub>oss</sub></b>	Output Capacitance		-	3992	-	
<b>C<sub>rSS</sub></b>	Reverse Transfer Capacitance		-	37	-	
<b>t<sub>d(ON)</sub></b>	Turn-on Delay Time	V <sub>GS</sub> =10V, V <sub>DS</sub> =50V, I <sub>D</sub> =1A, R <sub>GEN</sub> =1Ω	-	37	-	nS
<b>t<sub>r</sub></b>	Turn-on Rise Time		-	21	-	
<b>t<sub>d(OFF)</sub></b>	Turn-off Delay Time		-	78	-	
<b>t<sub>f</sub></b>	Turn-off Fall Time		-	107	-	
<b>Q<sub>g</sub></b>	Total Gate Charge	V <sub>GS</sub> =6V, V <sub>DS</sub> =50V, I <sub>D</sub> =30A	-	133	-	nC
<b>Q<sub>g</sub></b>	Total Gate Charge	V <sub>GS</sub> =10V, V <sub>DS</sub> =50V, I <sub>D</sub> =30A	-	203	-	
<b>Q<sub>gs</sub></b>	Gate-Source Charge		-	60	-	
<b>Q<sub>gd</sub></b>	Gate-Drain Charge		-	53	-	
<b>Source-Drain Characteristics</b>						
<b>V<sub>SD</sub><sup>④</sup></b>	Diode Forward Voltage	I <sub>SD</sub> =30A, V <sub>GS</sub> =0V	-	0.75	1.1	V
<b>t<sub>rr</sub></b>	Reverse Recovery Time	I <sub>F</sub> =10A, V <sub>R</sub> =30V	-	119	-	nS
<b>Q<sub>rr</sub></b>	Reverse Recovery Charge	di <sub>F</sub> /dt=100A/μs	-	347	-	nC

Note ④ : Pulse test (pulse width≤300us, duty cycle≤2%).

Note ⑤ : Guaranteed by design, not subject to production testing.

## N-Channel Typical Characteristics

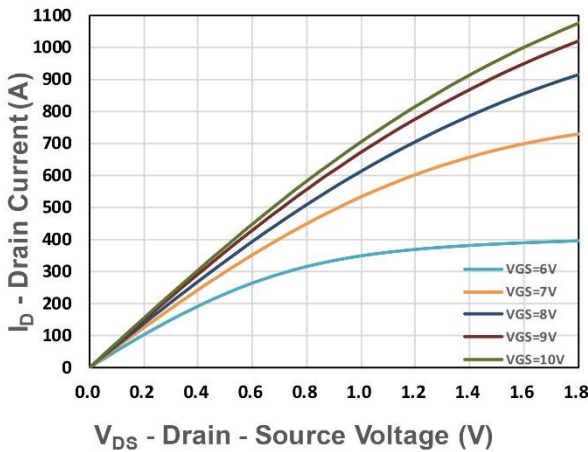


Figure 1. Output Characteristics

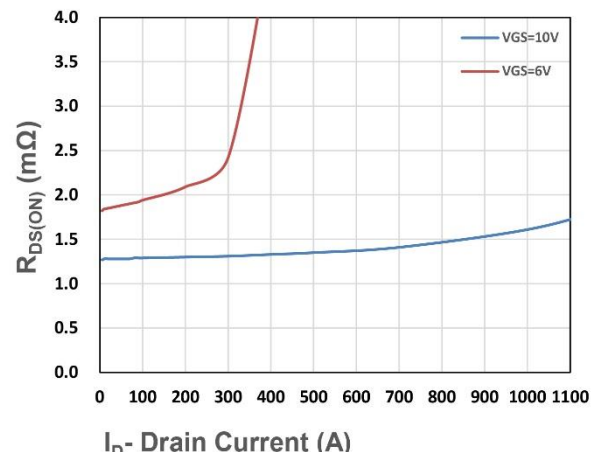


Figure 2. On-Resistance vs.  $I_D$

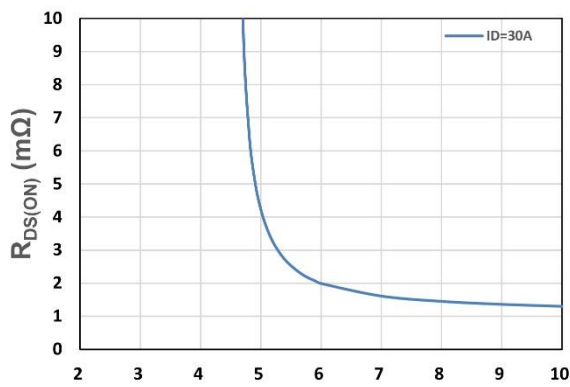


Figure 3. On-Resistance vs.  $V_{GS}$

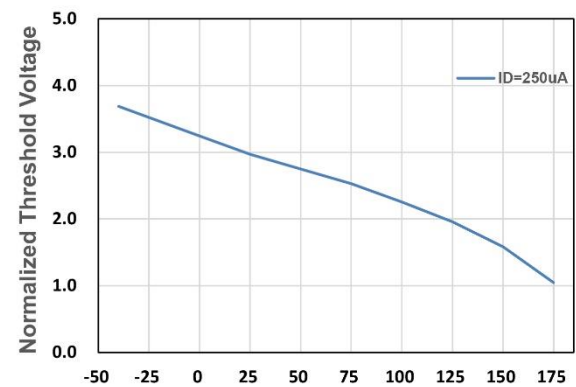


Figure 4. Gate Threshold Voltage

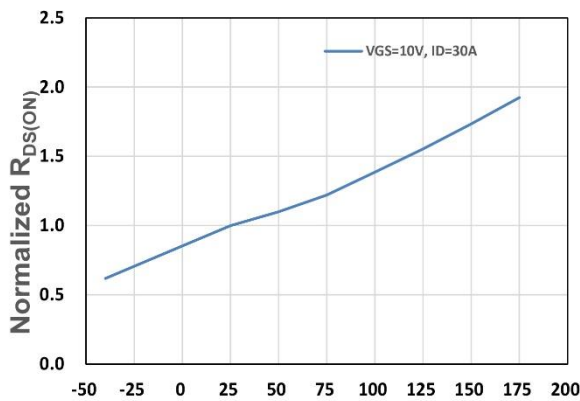


Figure 5. Drain-Source On Resistance



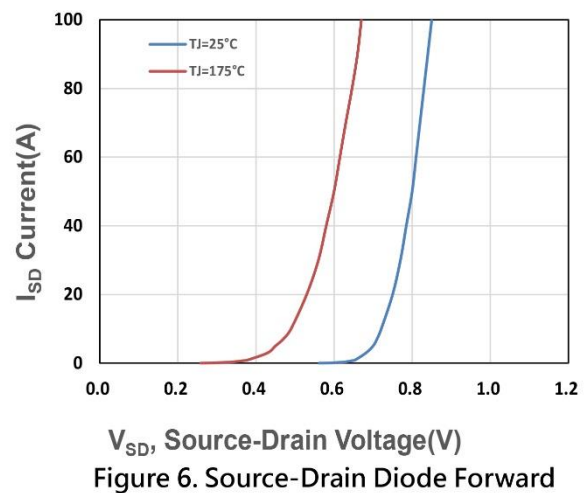



Figure 6. Source-Drain Diode Forward

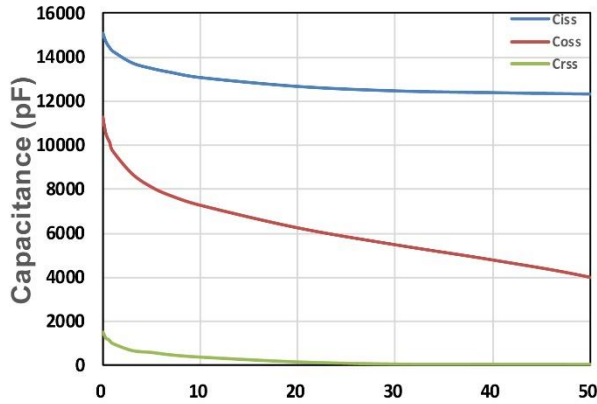


**V<sub>DS</sub> - Drain - Source Voltage (V)**  
Figure 7. Capacitance

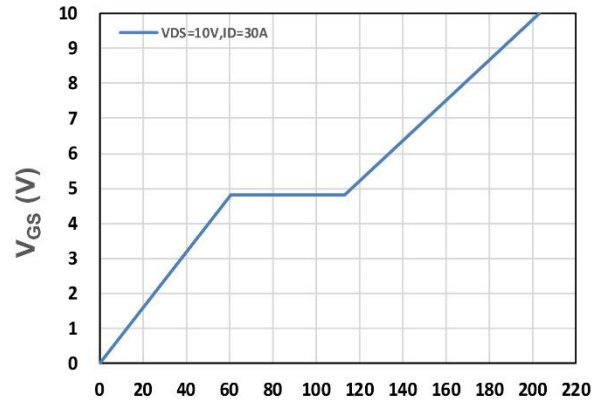


**Qg, Total Gate Charge (nC)**  
Figure 8. Gate Charge Characteristics

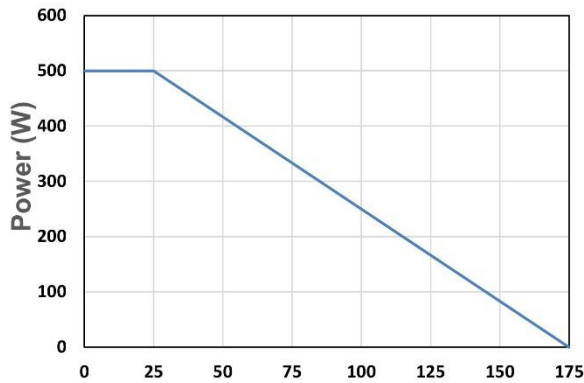


**Tc - Case Temperature (°C)**  
Figure 9. Power Dissipation

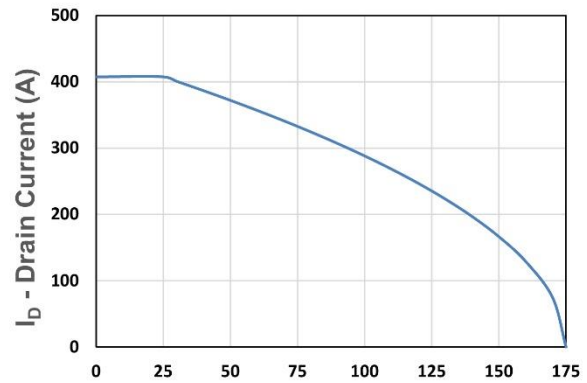

**Tc - Case Temperature (°C)**  
Figure 10. Drain Current

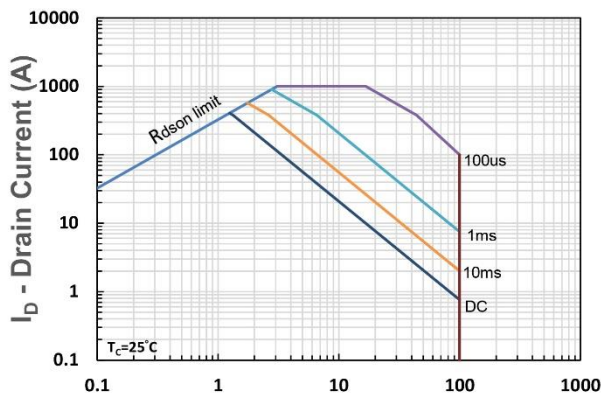

**V<sub>DS</sub> - Drain-Source Voltage (V)**  
Figure 11. Safe Operating Area

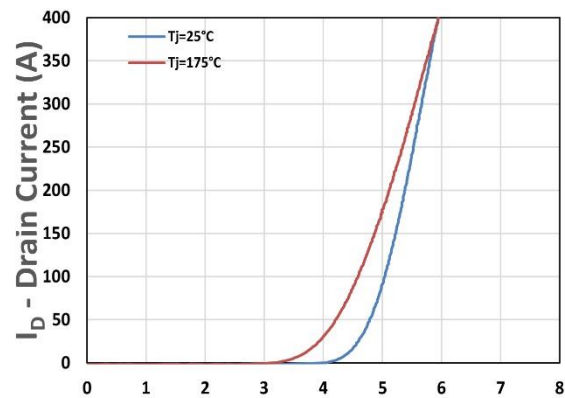

**V<sub>GS</sub> - Gate - Source Voltage (V)**  
Figure 12. Transfer Characteristics

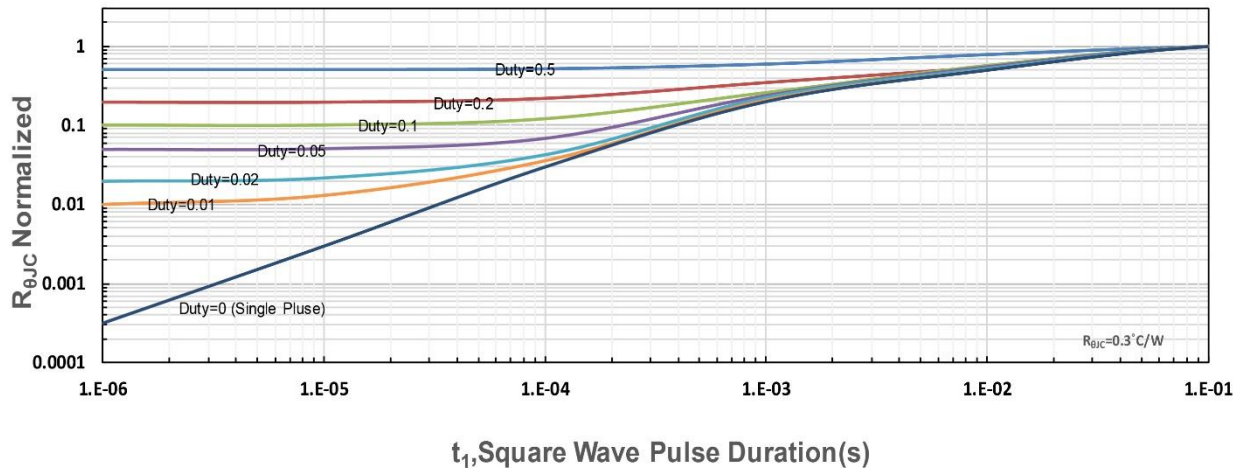


Figure 13.  $R_{\theta JC}$  Transient Thermal Impedance