



Power MOSFETS

DATASHEET

LM1A075NAK8A

N-Channel
Enhancement Mode MOSFET

- Leadpower-semiconductor Corp., Ltd
- sales@leadpower-semi.com
- (03) 6577339 FAX : (03) 6577229
- www.leadpower-semi.com



Quality Management Systems
ISO 9001:2015 Certificate

LM1A075NAK8A

N-Channel Enhancement Mode MOSFET

Pin Description

Product Summary

PDFN5*6		Symbol	Symbol	N-Channel	Unit
Top View	Bottom View				

Feature

- Fast switching speed
- Reliable and Rugged
- ROHS Compliant & Halogen-Free
- 100% UIS and Rg Tested

Applications

- Power Management in DC/DC Converters
- USB Power Delivery (USB PD)

Ordering Information

Orderable Part Number	Package Type	Form	Shipping	Marking
LM1A075NAK8A	PDFN5*6	Tape & Reel	5000 / Tape & Reel	1A075 <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/>

Note : = Lot Code

Absolute Maximum Ratings (T_J=25°C Unless Otherwise Noted)

Symbol	Parameter		N-Channel	Unit
V _{DSS}	Drain-Source Voltage		100	V
V _{GSS}	Gate-Source Voltage		±20	
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	°C
I _S	Diode Continuous Forward Current	T _c =25°C	60	A
I _{DM} ^①	Pulse Drain Current Tested	T _c =25°C	106	A
I _D	Continuous Drain Current	T _c =25°C	91	A
		T _c =100°C	57	
P _D	Maximum Power Dissipation	T _c =25°C	65.8	W
		T _c =100°C	26.3	
I _D	Continuous Drain Current	T _A =25°C	17.7	A
		T _A =70°C	14.1	
P _D	Maximum Power Dissipation	T _A =25°C	2.5	W
		T _A =70°C	1.6	
I _{AS} ^②	Avalanche Current, Single pulse	L=0.1mH	30	A
		L=0.5mH	19	
E _{AS} ^②	Avalanche Energy, Single pulse	L=0.1mH	45	mJ
		L=0.5mH	90	

Thermal Characteristics

Symbol	Parameter		Rating	Unit
R _{θJC}	Thermal Resistance-Junction to Case	Steady State	1.9	°C/W
R _{θJA} ^③	Thermal Resistance-Junction to Ambient	Steady State	50	°C/W

Note ① : Max. current is limited by bonding wire

Note ② : UIS tested and pulse width are limited by maximum junction temperature 150°C

Note ③ : Surface Mounted on 1in² FR-4 board with 1oz

LM1A075NAK8A

N-Channel Electrical Characteristics ($T_J=25^\circ\text{C}$ Unless Otherwise Noted)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Electrical Characteristics						
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{\text{GS}}=0\text{V}$, $I_{\text{DS}}=250\mu\text{A}$	100	-	-	V
I_{DSS}	Zero Gate Voltage Drain Current	$V_{\text{DS}}=80\text{V}$, $V_{\text{GS}}=0\text{V}$	-	-	1	μA
$V_{\text{GS(th)}}$	Gate Threshold Voltage	$V_{\text{DS}}=V_{\text{GS}}$, $I_{\text{DS}}=250\mu\text{A}$	1	2	3	V
I_{GSS}	Gate Leakage Current	$V_{\text{GS}}=\pm 20\text{V}$, $V_{\text{DS}}=0\text{V}$	-	-	± 100	nA
$R_{\text{DS(ON)}}^{\circledast}$	Drain-Source On-state Resistance	$V_{\text{GS}}=10\text{V}$, $I_{\text{DS}}=20\text{A}$	-	6.5	8	$\text{m}\Omega$
		$V_{\text{GS}}=4.5\text{V}$, $I_{\text{DS}}=10\text{A}$		9.5	12.5	
g_{fs}	Forward Transconductance	$V_{\text{DS}}=5\text{V}$, $I_{\text{DS}}=10\text{A}$	-	25.8	-	S
Dynamic Characteristics [®]						
R_{G}	Gate Resistance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=0\text{V}$, Freq.=1MHz	-	1	-	Ω
C_{iss}	Input Capacitance	$V_{\text{GS}}=0\text{V}$, $V_{\text{DS}}=50\text{V}$, Freq.=1MHz	-	2111	-	pF
C_{oss}	Output Capacitance		-	579	-	
C_{rss}	Reverse Transfer Capacitance		-	38	-	
$t_{\text{d(ON)}}$	Turn-on Delay Time	$V_{\text{GS}}=10\text{V}$, $V_{\text{DS}}=30\text{V}$, $I_{\text{D}}=1\text{A}$, $R_{\text{GEN}}=1\Omega$	-	14.5	-	nS
t_{r}	Turn-on Rise Time		-	8.1	-	
$t_{\text{d(OFF)}}$	Turn-off Delay Time		-	13.5	-	
t_{f}	Turn-off Fall Time		-	107	-	
Q_{g}	Total Gate Charge	$V_{\text{GS}}=4.5\text{V}$, $V_{\text{DS}}=50\text{V}$ $I_{\text{D}}=20\text{A}$	-	22.5	-	nC
Q_{g}	Total Gate Charge	$V_{\text{GS}}=10\text{V}$, $V_{\text{DS}}=50\text{V}$, $I_{\text{D}}=20\text{A}$	-	43.3	-	
Q_{gs}	Gate-Source Charge		-	8.1	-	
Q_{gd}	Gate-Drain Charge		-	10.8	-	
Source-Drain Characteristics						
$V_{\text{SD}}^{\circledast}$	Diode Forward Voltage	$I_{\text{SD}}=10\text{A}$, $V_{\text{GS}}=0\text{V}$	-	0.75	1.1	V
t_{rr}	Reverse Recovery Time	$I_{\text{F}}=10\text{A}$, $V_{\text{R}}=50\text{V}$	-	45.5	-	nS
Q_{rr}	Reverse Recovery Charge	$dI_{\text{F}}/dt=100\text{A}/\mu\text{s}$	-	51.1	-	nC

Note ④ : Pulse test (pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$).

Note ⑤ : Guaranteed by design, not subject to production testing.


LM1A075NAK8A

N-Channel Typical Characteristics

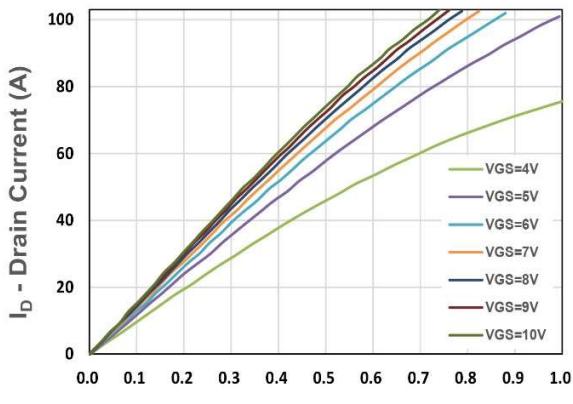


V_{DS} - Drain - Source Voltage (V)

Figure 1. Output Characteristics

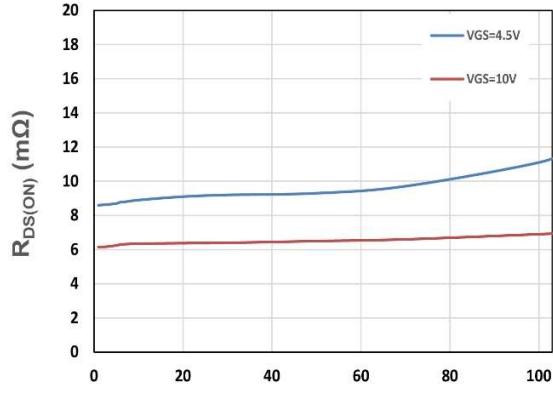


I_D - Drain Current (A)

Figure 2. On-Resistance vs. ID

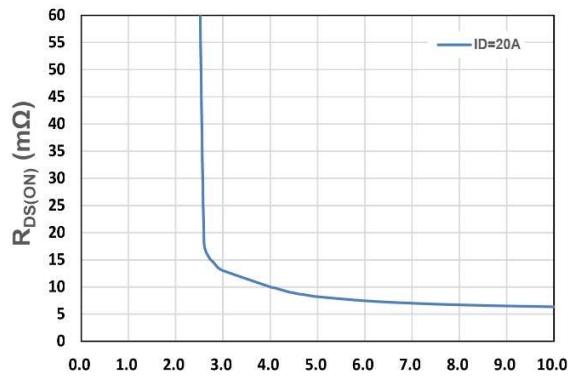


V_{GS} - Gate - Source Voltage (V)

Figure 3. On-Resistance vs. VGS

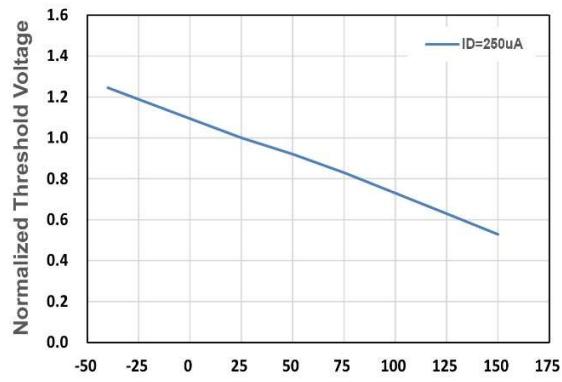


T_j , Junction Temperature(°C)

Figure 4. Gate Threshold Voltage

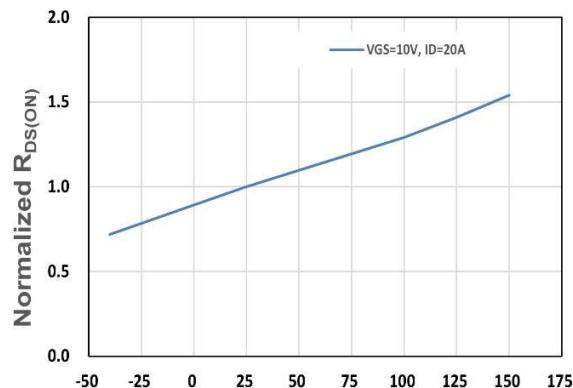

T_j , Junction Temperature(°C)

Figure 5. Drain-Source On Resistance

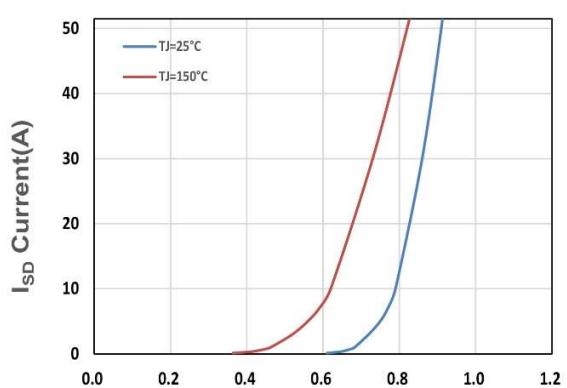


V_{SD} , Source-Drain Voltage(V)


Figure 6. Source-Drain Diode Forward

LM1A075NAK8A


Leadpower
Semiconductor

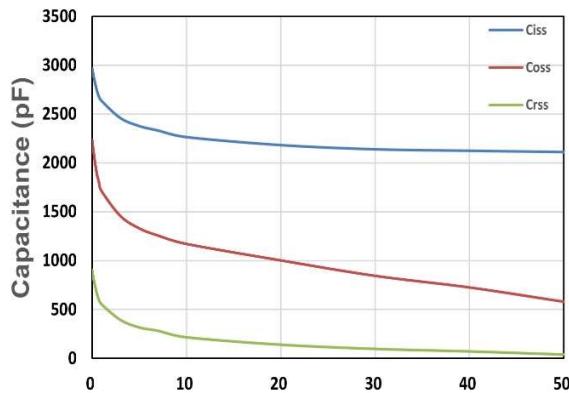


V_{DS} - Drain - Source Voltage (V)
Figure 7. Capacitance

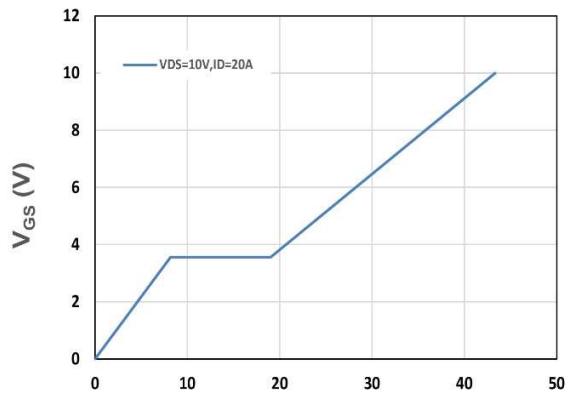


Q_g , Total Gate Charge (nC)
Figure 8. Gate Charge Characteristics

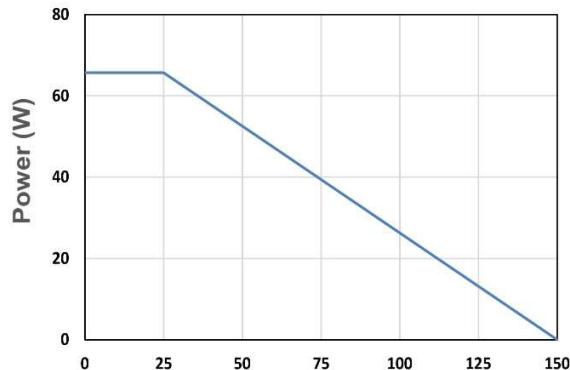


T_c - Case Temperature (°C)
Figure 9. Power Dissipation

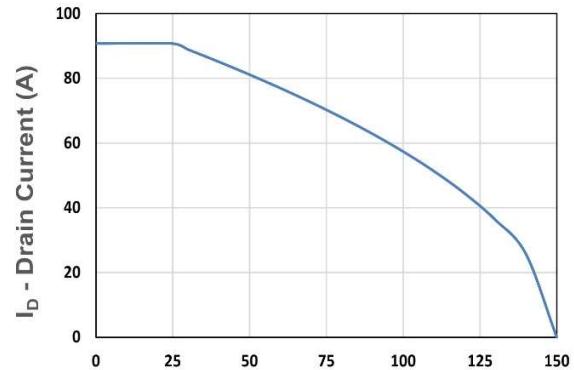

T_c - Case Temperature (°C)
Figure 10. Drain Current

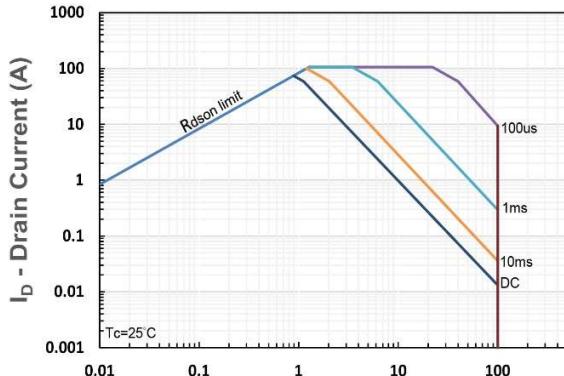

V_{DS} - Drain-Source Voltage (V)
Figure 11. Safe Operating Area

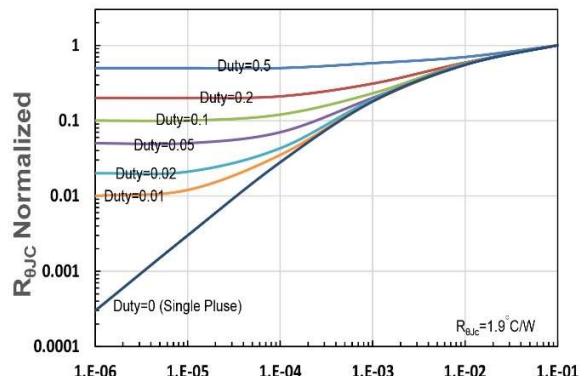

t_1 , Square Wave Pulse Duration(s)
Figure 12. $R_{θJC}$ Transient Thermal Impedance